

PORTABLE INSTRUMENT

# N330



VIBROMETER

MACHINE  
ANALYSER

SPECTRUM  
ANALYSER

BALANCER  
1-2 PLANES



**NEW**



# CEMB

BALANCING MACHINES

Australian / New Zealand Distributor-----  
**Machinery Vibration Specialists Aust P/L**  
121 St. Johns Avenue GORDON NSW 2072  
Ph: +61-2-9880-2422 Fx: +61-2-9880-2466  
Em: [mvs Aust@ozemail.com.au](mailto:mvs Aust@ozemail.com.au)  
Web: [www.MachineryVibrationSpecialists.com.au](http://www.MachineryVibrationSpecialists.com.au)

# N330 PORTABLE INSTRUMENT



## STANDARD ACCESSORIES

- No.1 accelerometer transducer 100mV/g
- No.1 magnetic base  $\varnothing$  25mm
- No.1 probe
- No.1 transducer connection cable L 2m
- No.1 Photocell complete with upright and magnetic base
- Graduated disk  $\varnothing$  96mm
- No.1 USB stick with manuals
- Battery charger with multiplug adapters
- Carrying case
- Micro USB Cable

## OPTIONAL ACCESSORIES

- No.1 Connection cable 5m for transducer
- N.1 Connection cable 5m for photocell
- No.1 Extension cable 10m for transducer
- No.1 Extension cable 10m for photocell
- Second Plane Balancing Kit, composed by:  
accelerometer  $\frac{1}{4}$ "28"UNF + 2m cable red  
+  $\varnothing$  25mm magnetic base and probe



# The Smart solution for vibration analysis and balancing

Intuitive functions under full control




10 KHz Vibrometer and Machine Analyzer with static and dynamic balancing function

- **4.3" color graphic display**  
Very high luminosity and contrast for sunlight use  
Wide view angle
- **Enhanced click keyboard**  
Optimal tactile feedback  
Designed for gloves use
- **Heavy duty and metallic connectors**
- **Fast measure**
- **Huge memory space**  
14.8 GByte, expandible to 128 GByte  
1000+ measures for each type
- **Easy reporting & software**  
Screenshot display capture and save  
Smart route data store  
N-EXPERT software for vibration analysis, balancing, report




## VIBROMETER & TACHO

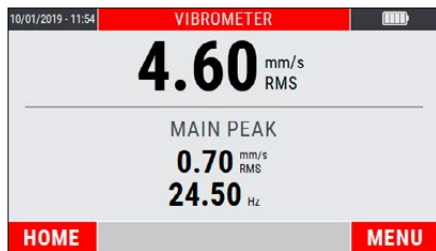


- Big readable characters
- Overall with main peak
- 1x fundamental with phase
- Speed rotation

## HIGH RESOLUTION FFT

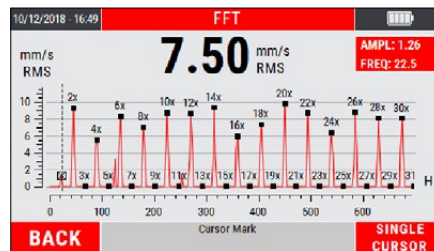


- Graphic zoom
- Peak cursors
- Autoscale feature
- List of main peaks

## SMART ANALYSIS

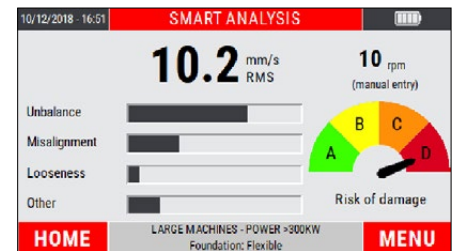


- Machine troubleshoot at a glance
- Vibration root cause identification
- Step by step according ISO10816-3
- Automatic speed detection

## GRINDING WHEEL BALANCING

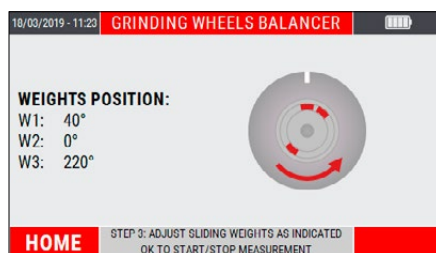


- Grinding balancing with 2 or 3 counterweights
- Graphic interface with real time correction
- Balancing Report

## ROTORS BALANCING

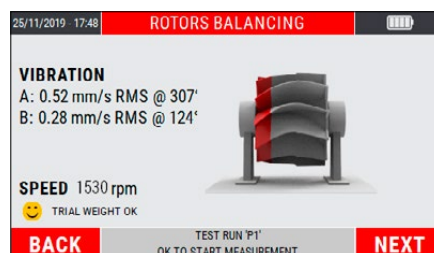

- Static/Dynamic balancing (1-2 planes)
- Check of trial weight effect
- Balancing tolerance according to ISO21940-11
- Estimate of trial weight calculation in grams
- Balancing by addition or removal mass

## ANGULAR SPLIT

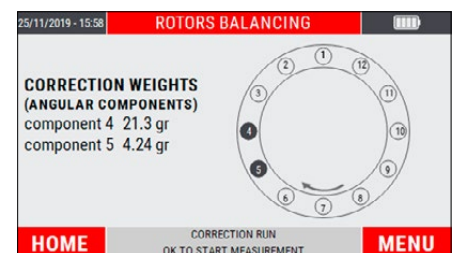

- Split angle calculation:
  - Split weights
  - Split on fixed available angular locations (from 1 up to 24)

# TECHNICAL DATA

## GENERAL CHARACTERISTICS

- Display: 4,3" colour LED-backlit TFT LCD (480 x 272 pixel)
- New EasyClick tactile keyboard with embossed keys
- Internal memory: 14,8 Gb (expandable to 128 Gb)
- Multi languages user interface

## MEASUREMENT TYPES

- Effective value (RMS)
- Peak value (Pk)
- Peak-to-peak value (PP)

## MEASURING PERFORMANCE

- Bandwidth: 1-10 KHz
- FFT Resolution: Max 3200 lines
- Tacho: Up to 250000 rpm

## UNITS OF MEASUREMENT

- Acceleration: [g]
- Velocity: [mm/s] or [inch/s]
- Displacement: [µm] or [mils]
- Frequency: [Hz] or [Cpm]

## INPUT

- Channel A: Vibrometer function – IEPE sensor (accelerometer and velomitor)  
Balancing function 1 plane - IEPE sensor (accelerometer and velomitor)  
With a specify cable pluggable on a BNC it can be used to read any dynamic signal max. 10V PkPk
- Channel B: balancing function 2 planes - IEPE sensor (accelerometer and velomitor)
- 1 photocell channel (velocity and angle reference)
- 1 MicroUSB 2.0 port for data transfer
- 1 jack plug for battery charger

## AMBIENT


- Temperature: from -20° to +50° C
- Air humidity: from 0 to 95% without condensate
- Protection: IP54

## POWER SUPPLY

- Long Life Battery: > 8 hours based on typical use
- Charging time: 2,5 hours for 80% recharge  
4 hours for 100% recharge
- Rechargeable 3100 mAh Lithium battery
- Power supply-battery charger for 100-240 V, 50/60 Hz (24 V, 1.5 A)

## CARRYING CASE DIMENSIONS AND WEIGHT

- Approx. 440 (L) x 360 (H) x 145 (D) 3350 g

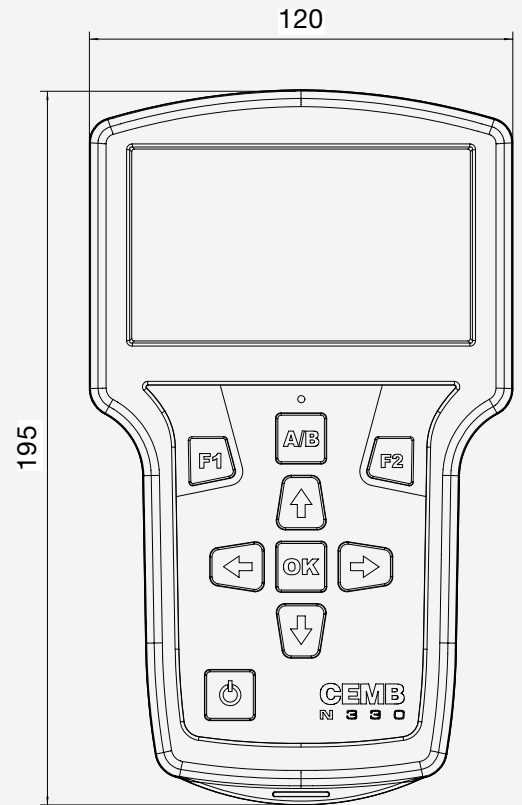

**CEMB S.p.A.** - Via Risorgimento, 9  
23826 Mandello del Lario (LC) - Italy  
[www.cemb.com](http://www.cemb.com)



**Vibration analysis division:**  
Phone +39 0341 706111  
e-mail: [stm@cemb.com](mailto:stm@cemb.com)

Australian / New Zealand Distributor-----  
**Machinery Vibration Specialists Aust P/L**  
121 St. Johns Avenue GORDON NSW 2072  
Ph: +61-2-9880-2422 Fx: +61-2-9880-2466  
Em: [mvs aust@ozemail.com.au](mailto:mvs aust@ozemail.com.au)  
Web: [www.MachineryVibrationSpecialists.com.au](http://www.MachineryVibrationSpecialists.com.au)

Tutti i dati e le caratteristiche menzionati in questo catalogo sono a titolo indicativo e non costituiscono nessun impegno per la nostra Società che si riserva il diritto di apportare senza alcun preavviso, tutte le variazioni che riterrà opportune.