


# VibChecker

Australian / New Zealand Distributor-----  
**Machinery Vibration Specialists Aust P/L**  
 121 St. Johns Avenue GORDON NSW 2072  
 Ph: +61-2-9880-2422 Fx: +61-2-9880-2466  
 Em: [mvs aust@ozemail.com.au](mailto:mvs aust@ozemail.com.au)  
 Web: [www.MachineryVibrationSpecialists.com.au](http://www.MachineryVibrationSpecialists.com.au)

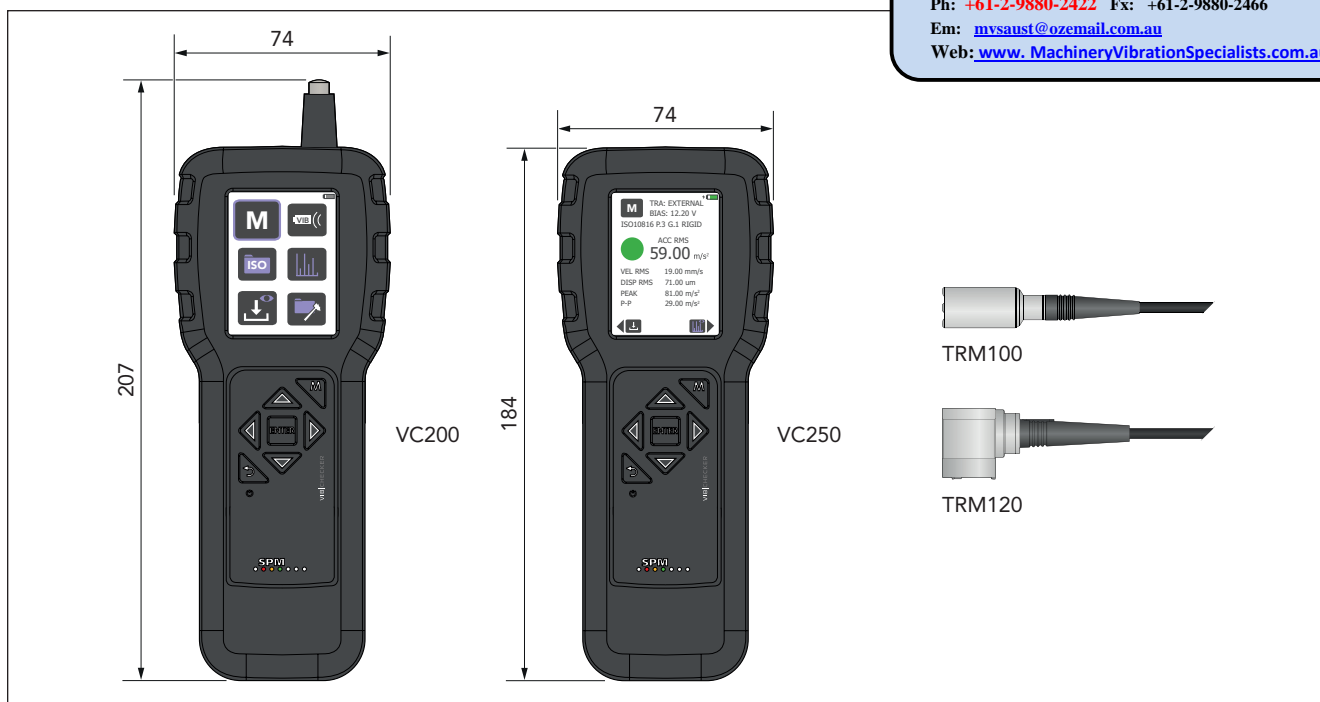

VibChecker is an instrument for fast and easy measurement of machine condition in preventive maintenance. It is based on the recommendations of ISO 2372 and ISO 10816 standards for broad band measurements of vibration. These standards make the assumption that limited information, obtained easily and at a low cost, is often as useful as a detailed analysis using expensive equipment and elaborate techniques.

The instrument measures either with a built-in probe (VC200) or with an external transducer. It is push button controlled

and basic measurement data are entered manually. Evaluated measuring results are indicated by green-yellow-red symbols, and a time signal and its FFT spectrum are produced for easy pattern recognition. Measurement results can also be transferred to a file for further processing, e.g. in Microsoft Excel.

For prepared kits containing instruments, carrying case, charger, charger cable, etc., see TD-573.

## Technical specifications

Frequency range: 10 to 1000 Hz  
 Readings: RMS/peak/peak-to-peak  
 Measuring range (sinus signal and 100 mV/g accelerometer):  
     Velocity RMS 100 mm/s (4 ips) at 80 Hz (inaccuracy 0.15 mm/s ±3%)  
     Acceleration RMS 100 m/s<sup>2</sup> (10 g) at 10-1000 Hz  
     Displacement RMS 100 µm (4 mil) at 80 Hz  
 Condition evaluation: according to ISO 2372 and ISO 10816 Part 2, 3, 4 > 600 rpm  
 Spectrum: linear, 200/400/800 lines, Hanning window, Hz/cpm, zoom, RPM markers  
 Time signal: 512/1024/2048 samples, zoom, marker  
 General functions: battery status, transducer check, metric or imperial units, language independent menus, storage of up to 10 measuring samples  
 Condition indication: green, yellow and red symbols  
 Display: 2.4" Color TFT LCD Display  
 Keypad: sealed, snap action  
 Material, casing: copolyester/TPE  
 Protection class: IP65  
 Power supply: 3.63 V Lithium Ion, USB rechargeable  
 Battery life: > 25 hours of normal use  
 Internal transducer: accelerometer type MEMS  
 Input connector: mini coax, for external transducer

External transducers: vibration transducer TRM100/TRM120 or IEPE (ICP®) type transducers with voltage output  
 Output connector: mini-B USB  
 Operating temperature: -10 °C to +50 °C (14 °F to 122 °F)  
 Size:  
     VC200: 207x74x41 mm (8.1x2.9x1.6 in)  
     VC250: 184x74x41 mm (7.2x2.9x1.6 in)  
 Weight:  
     VC200: 335 g (11.8 ounces)  
     VC250: 300 g (10.6 ounces)

## Part numbers

VC200 VibChecker with probe, excl. options  
 VC250 VibChecker without probe, excl. options

## Options

CAB52 Measuring cable, 1.5 m, mini coax - BNC slip-on  
 CAB78 Measuring cable, 1.5 m, mini coax - 2 pin  
 CAB94 Charger cable, USB type A to mini-B USB, 1.5 m  
 CAS24 Carrying case, plastic with foam inlay set for 1 BC/VC instrument, 326x222x116 mm  
 CAS29 Carrying case, plastic with foam inlay set for 2 BC/VC instruments, 437x379x130 mm  
 TRM100 Transducer with integral magnet, straight, 1.5 m  
 TRM120 Transducer with integral magnet, angled, 1.5 m  
 18226 Kit for screen protection (2 pcs screen protector)  
 90647 Charger, 100-240 V, 50-60 Hz, 6 W  
 93363 Cable adapter, mini coax - BNC  
 93062 Cable adapter, BNC - TNC, plug-jack



SPM Instrument AB • Box 504 • SE-645 25 Strängnäs • Sweden  
 Tel +46 152 22500 • [info@spminstrument.se](mailto:info@spminstrument.se) • [www.spminstrument.com](http://www.spminstrument.com)

Technical data are subject to change without notice.  
 ISO 9001 certified. © Copyright SPM 2020-10. TD-555 B Rev.3

